



UNITED STATES PATENT AND TRADEMARK OFFICE

UNITED STATES DEPARTMENT OF COMMERCE
United States Patent and Trademark Office
Address: COMMISSIONER FOR PATENTS
P.O. Box 1450
Alexandria, Virginia 22313-1450
www.uspto.gov

NOTICE OF ALLOWANCE AND FEE(S) DUE

7590 03/10/2004
Wolfram Gorisch
Dueppeler Str. 20
D-81929 Muenchen, D-81929
GERMANY

EXAMINER

PHAN, HAU VAN

ART UNIT

PAPER NUMBER

3618

DATE MAILED: 03/10/2004

APPLICATION NO.	FILING DATE	FIRST NAMED INVENTOR	ATTORNEY DOCKET NO.	CONFIRMATION NO.
10/026,567	12/26/2001	Wolfram Gorisch		9550

TITLE OF INVENTION: TILT-STEERED ROLLING DEVICE

APPLN. TYPE	SMALL ENTITY	ISSUE FEE	PUBLICATION FEE	TOTAL FEE(S) DUE	DATE DUE
nonprovisional	YES	\$665	\$300	\$965	06/10/2004

THE APPLICATION IDENTIFIED ABOVE HAS BEEN EXAMINED AND IS ALLOWED FOR ISSUANCE AS A PATENT. PROSECUTION ON THE MERITS IS CLOSED. THIS NOTICE OF ALLOWANCE IS NOT A GRANT OF PATENT RIGHTS. THIS APPLICATION IS SUBJECT TO WITHDRAWAL FROM ISSUE AT THE INITIATIVE OF THE OFFICE OR UPON PETITION BY THE APPLICANT. SEE 37 CFR 1.313 AND MPEP 1308.

THE ISSUE FEE AND PUBLICATION FEE (IF REQUIRED) MUST BE PAID WITHIN THREE MONTHS FROM THE MAILING DATE OF THIS NOTICE OR THIS APPLICATION SHALL BE REGARDED AS ABANDONED. THIS STATUTORY PERIOD CANNOT BE EXTENDED. SEE 35 U.S.C. 151. THE ISSUE FEE DUE INDICATED ABOVE REFLECTS A CREDIT FOR ANY PREVIOUSLY PAID ISSUE FEE APPLIED IN THIS APPLICATION. THE PTOL-85B (OR AN EQUIVALENT) MUST BE RETURNED WITHIN THIS PERIOD EVEN IF NO FEE IS DUE OR THE APPLICATION WILL BE REGARDED AS ABANDONED.

HOW TO REPLY TO THIS NOTICE:

I. Review the SMALL ENTITY status shown above.

If the SMALL ENTITY is shown as YES, verify your current SMALL ENTITY status:

A. If the status is the same, pay the TOTAL FEE(S) DUE shown above.

B. If the status is changed, pay the PUBLICATION FEE (if required) and twice the amount of the ISSUE FEE shown above and notify the United States Patent and Trademark Office of the change in status, or

If the SMALL ENTITY is shown as NO:

A. Pay TOTAL FEE(S) DUE shown above, or

B. If applicant claimed SMALL ENTITY status before, or is now claiming SMALL ENTITY status, check the box below and enclose the PUBLICATION FEE and 1/2 the ISSUE FEE shown above.

☐ Applicant claims SMALL ENTITY status.
See 37 CFR 1.27.

II. PART B - FEE(S) TRANSMITTAL should be completed and returned to the United States Patent and Trademark Office (USPTO) with your ISSUE FEE and PUBLICATION FEE (if required). Even if the fee(s) have already been paid, Part B - Fee(s) Transmittal should be completed and returned. If you are charging the fee(s) to your deposit account, section "4b" of Part B - Fee(s) Transmittal should be completed and an extra copy of the form should be submitted.

III. All communications regarding this application must give the application number. Please direct all communications prior to issuance to Mail Stop ISSUE FEE unless advised to the contrary.

IMPORTANT REMINDER: Utility patents issuing on applications filed on or after Dec. 12, 1980 may require payment of maintenance fees. It is patentee's responsibility to ensure timely payment of maintenance fees when due.

PART B - FEE(S) TRANSMITTAL

Complete and send this form, together with applicable fee(s), to: **Mail**

**Mail Stop ISSUE FEE
Commissioner for Patents
P.O. Box 1450
Alexandria, Virginia 22313-1450
(703) 746-4000**

or **Fax**

INSTRUCTIONS: This form should be used for transmitting the ISSUE FEE and PUBLICATION FEE (if required). Blocks 1 through 4 should be completed where appropriate. All further correspondence including the Patent, advance orders and notification of maintenance fees will be mailed to the current correspondence address as indicated unless corrected below or directed otherwise in Block 1, by (a) specifying a new correspondence address; and/or (b) indicating a separate "FEE ADDRESS" for maintenance fee notifications.

CURRENT CORRESPONDENCE ADDRESS (Note: Legibly mark-up with any corrections or use Block 1)

7590 03/10/2004

**Wolfram Gorisch
Dueppeler Str. 20
D-81929 Muenchen, D-81929
GERMANY**

Note: A certificate of mailing can only be used for domestic mailings of the Fee(s) Transmittal. This certificate cannot be used for any other accompanying papers. Each additional paper, such as an assignment or formal drawing, must have its own certificate of mailing or transmission.

Certificate of Mailing or Transmission

I hereby certify that this Fee(s) Transmittal is being deposited with the United States Postal Service with sufficient postage for first class mail in an envelope addressed to the Mail Stop ISSUE FEE address above, or being facsimile transmitted to the USPTO, on the date indicated below.

(Depositor's name)
(Signature)
(Date)

APPLICATION NO.	FILING DATE	FIRST NAMED INVENTOR	ATTORNEY DOCKET NO.	CONFIRMATION NO.
10/026,567	12/26/2001	Wolfram Gorisch		9550

TITLE OF INVENTION: TILT-STEERED ROLLING DEVICE

APPLN. TYPE	SMALL ENTITY	ISSUE FEE	PUBLICATION FEE	TOTAL FEE(S) DUE	DATE DUE
nonprovisional	YES	\$665	\$300	\$965	06/10/2004

EXAMINER	ART UNIT	CLASS-SUBCLASS
PHAN, HAU VAN	3618	280-011270

1. Change of correspondence address or indication of "Fee Address" (37 CFR 1.363).

- ☐ Change of correspondence address (or Change of Correspondence Address form PTO/SB/122) attached.
- ☐ "Fee Address" indication (or "Fee Address" Indication form PTO/SB/47; Rev 03-02 or more recent) attached. **Use of a Customer Number is required.**

2. For printing on the patent front page, list (1) the names of up to 3 registered patent attorneys or agents OR, alternatively, (2) the name of a single firm (having as a member a registered attorney or agent) and the names of up to 2 registered patent attorneys or agents. If no name is listed, no name will be printed.

1 _____
2 _____
3 _____

3. ASSIGNEE NAME AND RESIDENCE DATA TO BE PRINTED ON THE PATENT (print or type)

PLEASE NOTE: Unless an assignee is identified below, no assignee data will appear on the patent. Inclusion of assignee data is only appropriate when an assignment has been previously submitted to the USPTO or is being submitted under separate cover. Completion of this form is NOT a substitute for filing an assignment.

(A) NAME OF ASSIGNEE

(B) RESIDENCE: (CITY and STATE OR COUNTRY)

Please check the appropriate assignee category or categories (will not be printed on the patent); ☐ individual ☐ corporation or other private group entity ☐ government

4a. The following fee(s) are enclosed:

- ☐ Issue Fee
- ☐ Publication Fee
- ☐ Advance Order - # of Copies _____

4b. Payment of Fee(s):

- ☐ A check in the amount of the fee(s) is enclosed.
- ☐ Payment by credit card. Form PTO-2038 is attached.
- ☐ The Director is hereby authorized by charge the required fee(s), or credit any overpayment, to Deposit Account Number _____ (enclose an extra copy of this form).

Director for Patents is requested to apply the Issue Fee and Publication Fee (if any) or to re-apply any previously paid issue fee to the application identified above.

(Authorized Signature)	(Date)
<p>NOTE: The Issue Fee and Publication Fee (if required) will not be accepted from anyone other than the applicant; a registered attorney or agent; or the assignee or other party in interest as shown by the records of the United States Patent and Trademark Office.</p> <p>This collection of information is required by 37 CFR 1.311. The information is required to obtain or retain a benefit by the public which is to file (and by the USPTO to process) an application. Confidentiality is governed by 35 U.S.C. 122 and 37 CFR 1.14. This collection is estimated to take 12 minutes to complete, including gathering, preparing, and submitting the completed application form to the USPTO. Time will vary depending upon the individual case. Any comments on the amount of time you require to complete this form and/or suggestions for reducing this burden, should be sent to the Chief Information Officer, U.S. Patent and Trademark Office, U.S. Department of Commerce, Alexandria, Virginia 22313-1450. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Commissioner for Patents, Alexandria, Virginia 22313-1450.</p> <p>Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.</p>	

TRANSMIT THIS FORM WITH FEE(S)



UNITED STATES PATENT AND TRADEMARK OFFICE

UNITED STATES DEPARTMENT OF COMMERCE
United States Patent and Trademark Office
Address: COMMISSIONER FOR PATENTS
P.O. Box 1450
Alexandria, Virginia 22313-1450
www.uspto.gov

APPLICATION NO.	FILING DATE	FIRST NAMED INVENTOR	ATTORNEY DOCKET NO.	CONFIRMATION NO.
10/026,567	12/26/2001	Wolfram Gorisch		9550
7590	03/10/2004			

Wolfram Gorisch
Dueppeler Str. 20
D-81929 Muenchen, D-81929
GERMANY

EXAMINER
PHAN, HAU VAN

ART UNIT	PAPER NUMBER
3618	

DATE MAILED: 03/10/2004

Determination of Patent Term Adjustment under 35 U.S.C. 154 (b) (application filed on or after May 29, 2000)

The Patent Term Adjustment to date is 131 day(s). If the issue fee is paid on the date that is three months after the mailing date of this notice and the patent issues on the Tuesday before the date that is 28 weeks (six and a half months) after the mailing date of this notice, the Patent Term Adjustment will be 131 day(s).

If a Continued Prosecution Application (CPA) was filed in the above-identified application, the filing date that determines Patent Term Adjustment is the filing date of the most recent CPA.

Applicant will be able to obtain more detailed information by accessing the Patent Application Information Retrieval (PAIR) system (<http://pair.uspto.gov>).

Any questions regarding the Patent Term Extension or Adjustment determination should be directed to the Office of Patent Legal Administration at (703) 305-1383. Questions relating to issue and publication fee payments should be directed to the Customer Service Center of the Office of Patent Publication at (703) 305-8283.

Notice of Allowability	Application No. 10/026,567	Applicant(s) GORISCH, WOLFRAM	
	Examiner Hau V Phan	Art Unit 3618	

-- The MAILING DATE of this communication appears on the cover sheet with the correspondence address--

All claims being allowable, PROSECUTION ON THE MERITS IS (OR REMAINS) CLOSED in this application. If not included herewith (or previously mailed), a Notice of Allowance (PTOL-85) or other appropriate communication will be mailed in due course. **THIS NOTICE OF ALLOWABILITY IS NOT A GRANT OF PATENT RIGHTS.** This application is subject to withdrawal from issue at the initiative of the Office or upon petition by the applicant. See 37 CFR 1.313 and MPEP 1308.

1. ☒ This communication is responsive to 3/2/2004.
2. ☒ The allowed claim(s) is/are 1-14.
3. ☒ The drawings filed on 3/2/2004 are accepted by the Examiner.
4. ☐ Acknowledgment is made of a claim for foreign priority under 35 U.S.C. § 119(a)-(d) or (f).
 - a) ☐ All b) ☐ Some* c) ☐ None of the:
 1. ☐ Certified copies of the priority documents have been received.
 2. ☐ Certified copies of the priority documents have been received in Application No. _____.
 3. ☐ Copies of the certified copies of the priority documents have been received in this national stage application from the International Bureau (PCT Rule 17.2(a)).

* Certified copies not received: _____.

Applicant has THREE MONTHS FROM THE "MAILING DATE" of this communication to file a reply complying with the requirements noted below. Failure to timely comply will result in ABANDONMENT of this application.
THIS THREE-MONTH PERIOD IS NOT EXTENDABLE.

5. ☐ A SUBSTITUTE OATH OR DECLARATION must be submitted. Note the attached EXAMINER'S AMENDMENT or NOTICE OF INFORMAL PATENT APPLICATION (PTO-152) which gives reason(s) why the oath or declaration is deficient.
 6. ☐ CORRECTED DRAWINGS (as "replacement sheets") must be submitted.
 - (a) ☐ including changes required by the Notice of Draftsperson's Patent Drawing Review (PTO-948) attached
 - 1) ☐ hereto or 2) ☐ to Paper No./Mail Date _____.
 - (b) ☐ including changes required by the attached Examiner's Amendment / Comment or in the Office action of Paper No./Mail Date _____.
- Identifying indicia such as the application number (see 37 CFR 1.84(c)) should be written on the drawings in the front (not the back) of each sheet. Replacement sheet(s) should be labeled as such in the header according to 37 CFR 1.121(d).
7. ☐ DEPOSIT OF and/or INFORMATION about the deposit of BIOLOGICAL MATERIAL must be submitted. Note the attached Examiner's comment regarding REQUIREMENT FOR THE DEPOSIT OF BIOLOGICAL MATERIAL.

Attachment(s)

- | | |
|---|---|
| <ol style="list-style-type: none"> 1. <input type="checkbox"/> Notice of References Cited (PTO-892) 2. <input type="checkbox"/> Notice of Draftsperson's Patent Drawing Review (PTO-948) 3. <input type="checkbox"/> Information Disclosure Statements (PTO-1449 or PTO/SB/08),
Paper No./Mail Date _____ 4. <input type="checkbox"/> Examiner's Comment Regarding Requirement for Deposit
of Biological Material | <ol style="list-style-type: none"> 5. <input type="checkbox"/> Notice of Informal Patent Application (PTO-152) 6. <input type="checkbox"/> Interview Summary (PTO-413),
Paper No./Mail Date _____ 7. <input type="checkbox"/> Examiner's Amendment/Comment 8. <input type="checkbox"/> Examiner's Statement of Reasons for Allowance 9. <input type="checkbox"/> Other _____ |
|---|---|

**BRYAN FISCHMANN
PATENT EXAMINER**



Application/Control Number: 10/026,457 567

Art Unit: 3618

Reference: Office Action, Mailing date 12/12/2003

Examiner: Hau V Phan

please enter
Hr
The following are the claims, amended in order to overcome the rejections set forth in the office action. Only a marked-up version is included.

3/5/04 **Claims**

RECEIVED
FEB 05 2004
GROUP 3600

CLAIMS

I claim:

1. (currently amended): A tilt-steered rolling device, comprising a platform which includes at least one extension~~extensions~~, and comprising at least three wheels, two of them being arranged side by side as a wheel pair, the wheels of the wheel pair each being rotatably affixed to a separate wheel holder using axles, the two wheel holders being interconnected by two cross-guides using at least four pivot links forming a trapezium or a parallelogram link chain, wherein the first cross-guide is rotatably secured to at least one extension~~extensions~~ of the platform and the second cross-guide is ~~universally joined~~ jointed to ~~with an~~ at least one extension of the platform, and wherein the direction of the rotation axis of the first cross-guide is at an acute angle α ~~(alpha)~~ to the direction of ~~the~~ four pivot axes of the at least four links of the link chain.

2. (original): A device as defined in claim 1, wherein each axle of the two wheels of the wheel pair is attached only to one side of the respective wheel holder.

3. (withdrawn): A device as defined in claim 1, wherein the pivot axes of the first cross-guide are separated by a distance which is equal to the distance between the pivot axes of the second cross-guide.

4. (previously presented) A device as defined in claim 1, wherein the distance between the two pivot axes of the first cross-guide and the distance between the two pivot axes of the second cross-guide are both equal to the track width of the two wheels of the wheel pair.

5. (currently amended): A device as defined in claim 1, wherein the second cross-guide is rotatably secured to at least one extension ~~extensions~~ of the platform wherein the rotation axis of the second cross-guide is directed parallel to the rotation axis of the first cross-guide.

6. (currently amended): A device as defined in claim 1, wherein two universal joints are used to allow the first cross-guide to rotate around ~~its~~ a rotation axis where the rotation axis is defined by the ~~centres~~ centers of the two universal joints.

7. (currently amended): A device as defined in claim 1, wherein ~~the~~ an intersection point ~~K~~ (K) which is generated when the middle parallel line between the two upper pivot axes of the parallelogram link chain intersects with the rotation axis of the first cross-guide, is located vertically above the axles of the wheels of the wheel pair.

8. (withdrawn): A device as defined in claim 7, wherein the intersection point (K) is located vertically above the axes of the wheels of the wheel pair.

9. (withdrawn): A device as defined in claim 8, wherein the swivel axis which is defined by the centers of the two universal joints of the first cross-guide lies in the plane which extends along the central longitudinal axis of the platform and which is also oriented perpendicular to the platform.

10. (withdrawn): A device as defined in claim 1, wherein a flexing means is comprised which forces the wheel pair to return from the tilt or which maintains it in a preferred neutral position.

11. (previously presented): A device as defined in claim 1, wherein a single wheel is rotatably affixed at one end of the device.

12. (original): A device as defined in claim 1, wherein the device has tilt-steering wheel pairs at both ends.

13. (withdrawn): A device as defined in claim 1, wherein an extension supporting a tilt-steering wheel pair is fixed flexibly to the platform at one point, to permit small movements of the wheel pair essentially vertically to the platform, and to allow inclusion of a shock absorbing device.

14. (previously presented): A device as defined in claim 1, wherein the device has one tilt-steered wheel pair and one wheel pair in-line at opposite ends.



Application/Control Number: 10/026,457

Art Unit: 3618

Reference: Office Action, Mailing date 12/12/2003

Examiner: Hau V Phan

drawing approved
The following are the amendment drawing figures including the replacement sheets and the annotated marked-up drawings, based on the substitute specification.

HP
Amendment drawings

3/5/04
(deletions and renumbering only)

RECEIVED
FEB 05 2004
GROUP 3600



Replacement sheet

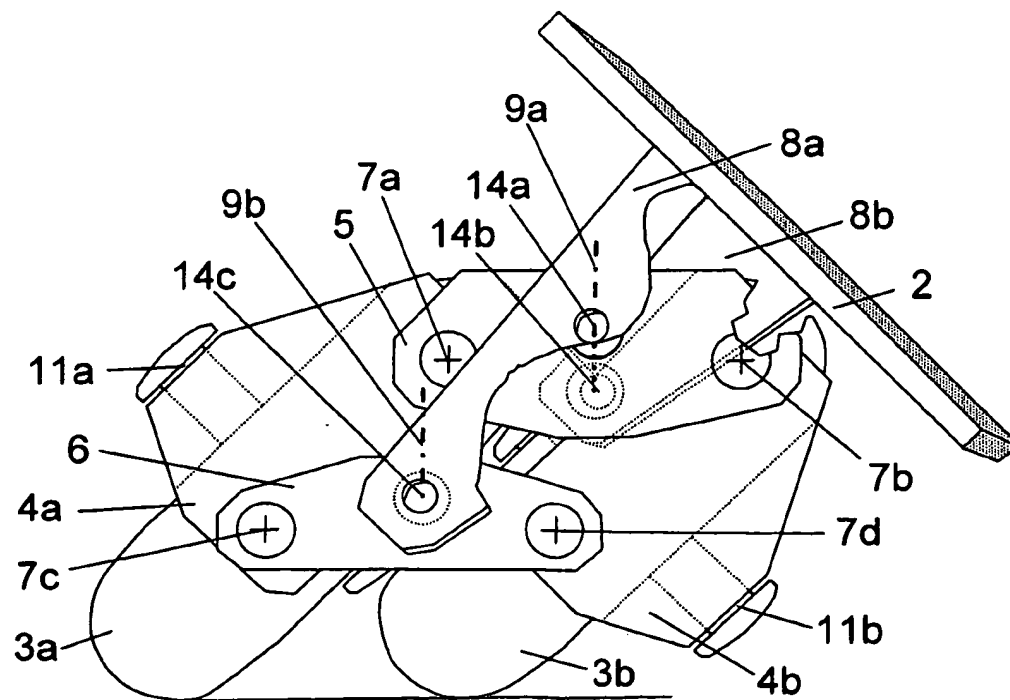
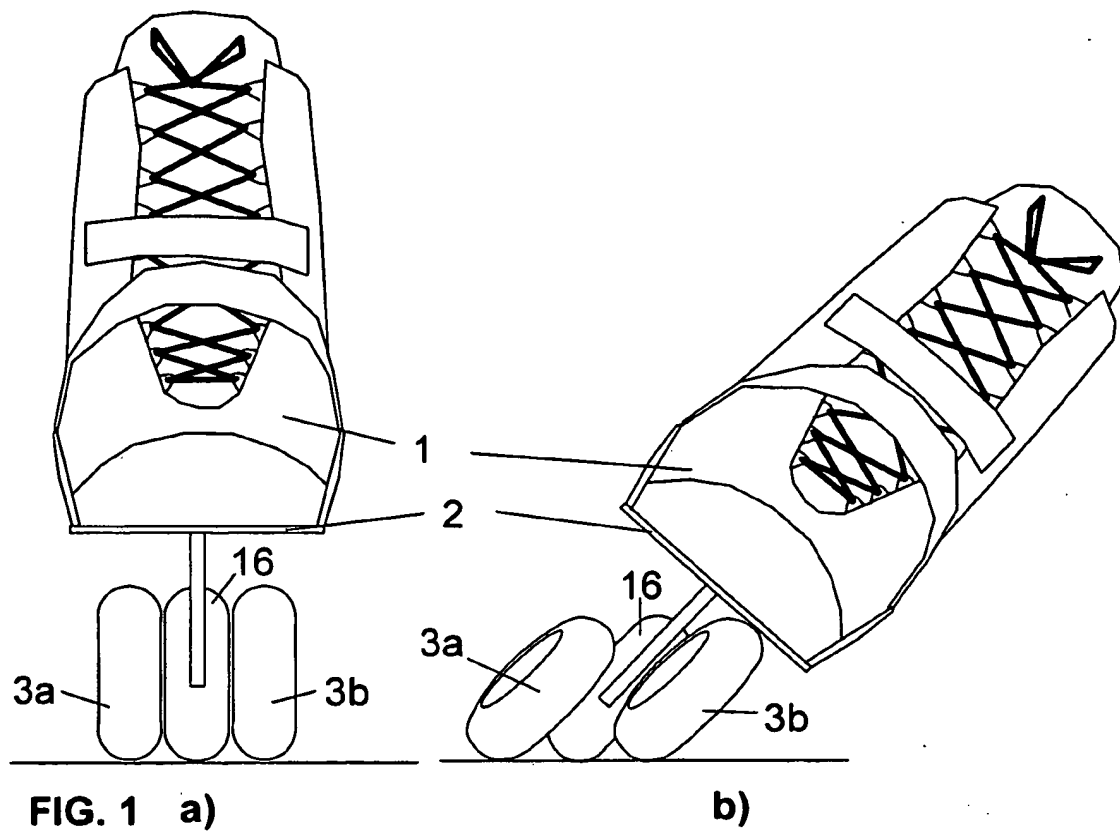


FIG. 2

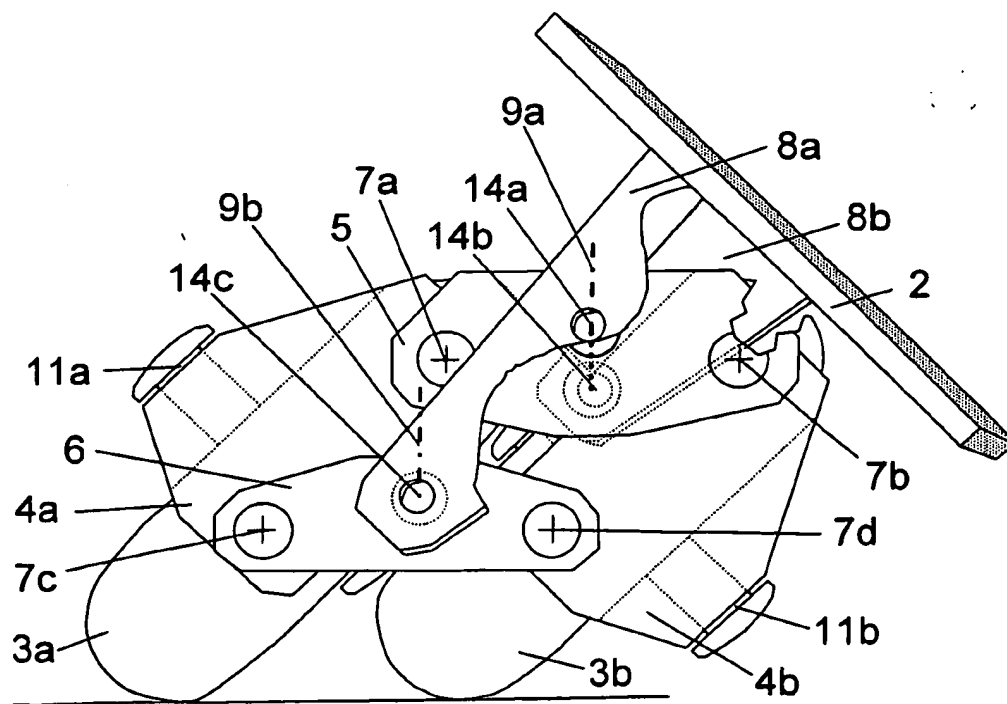
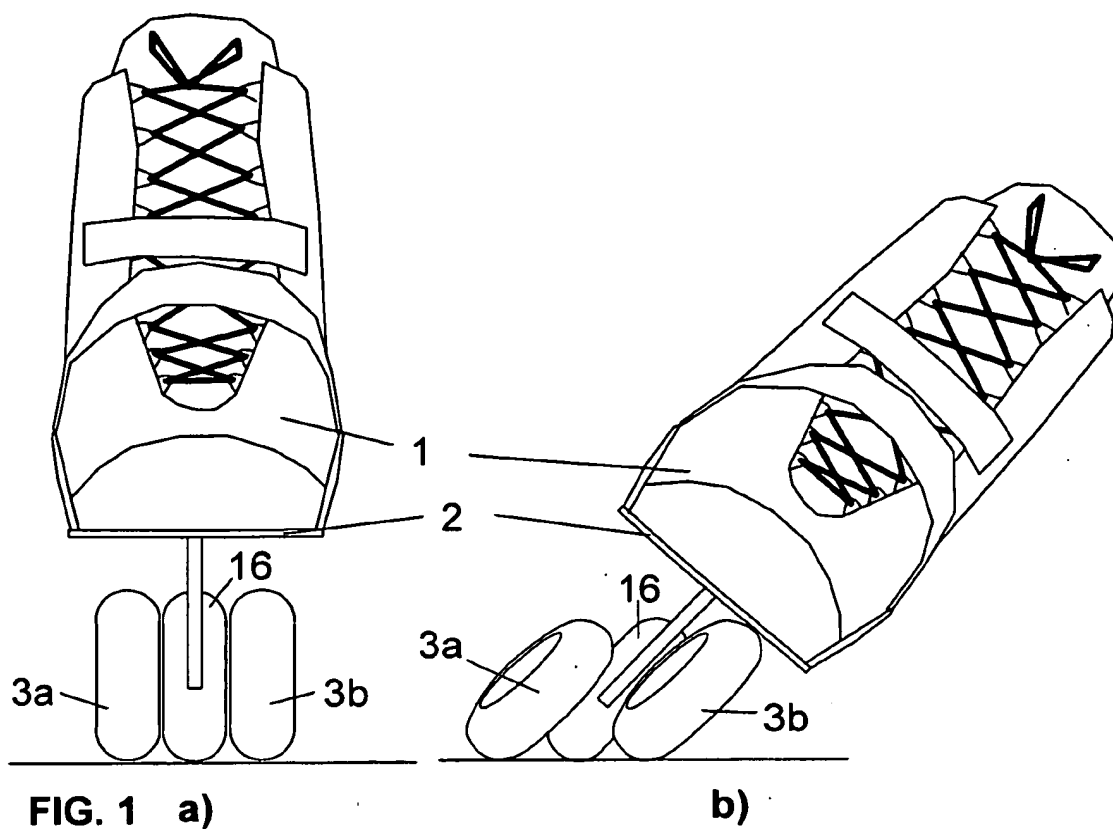


FIG. 2

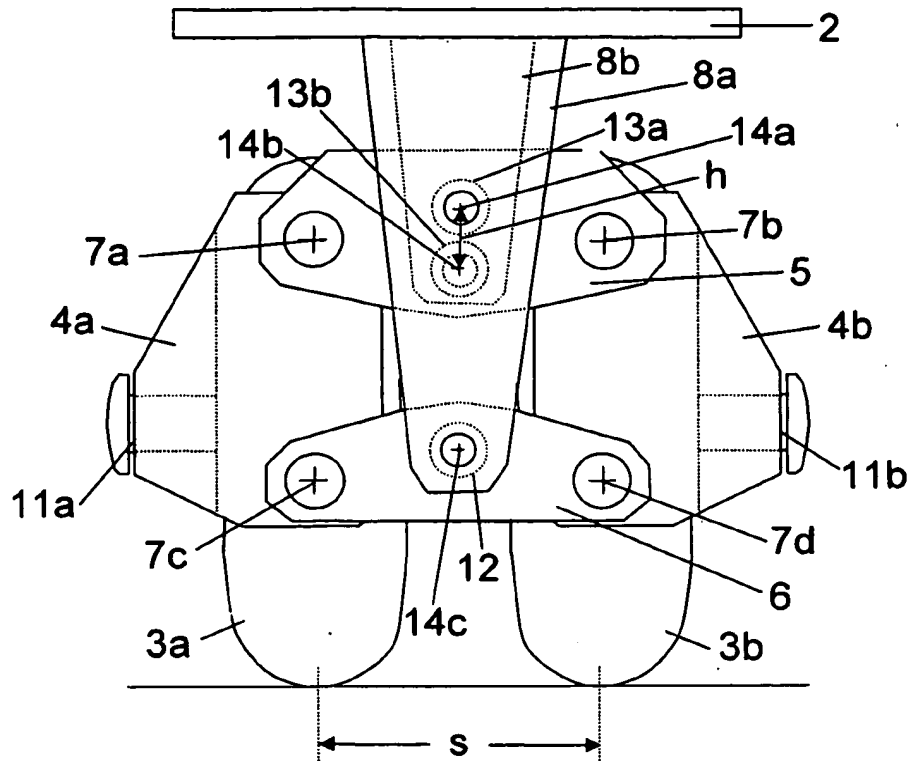



FIG. 3

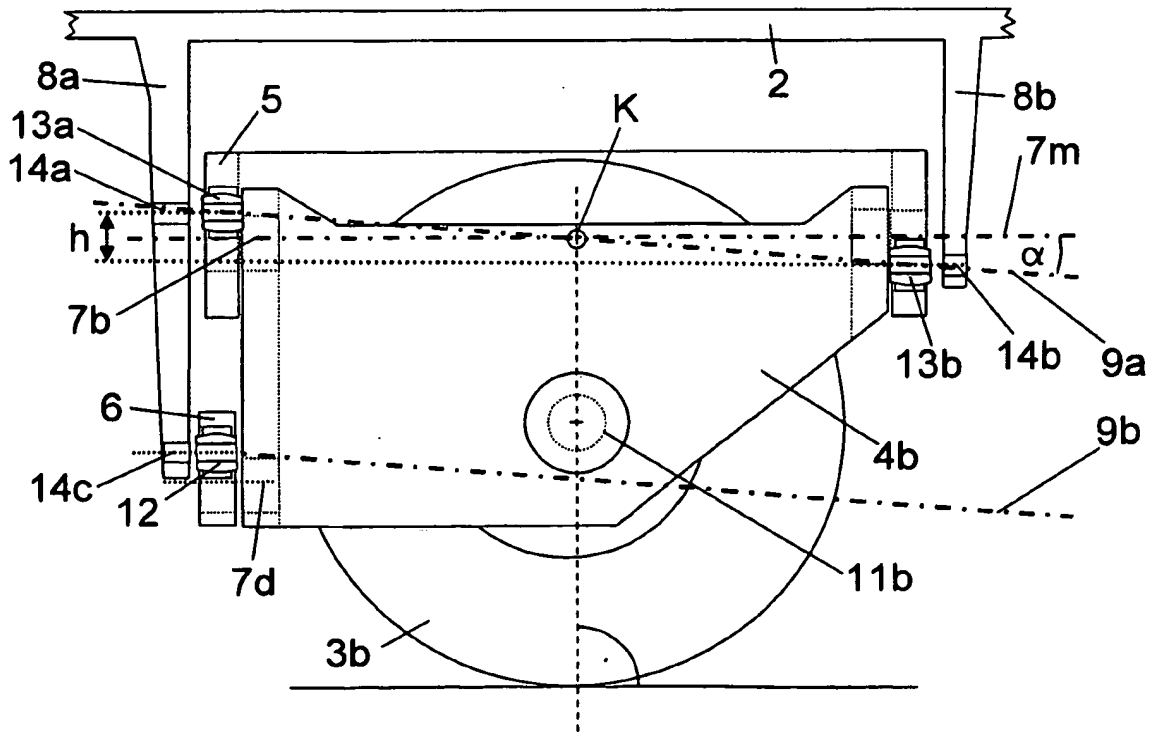


FIG. 4



Annotated marked-up drawing

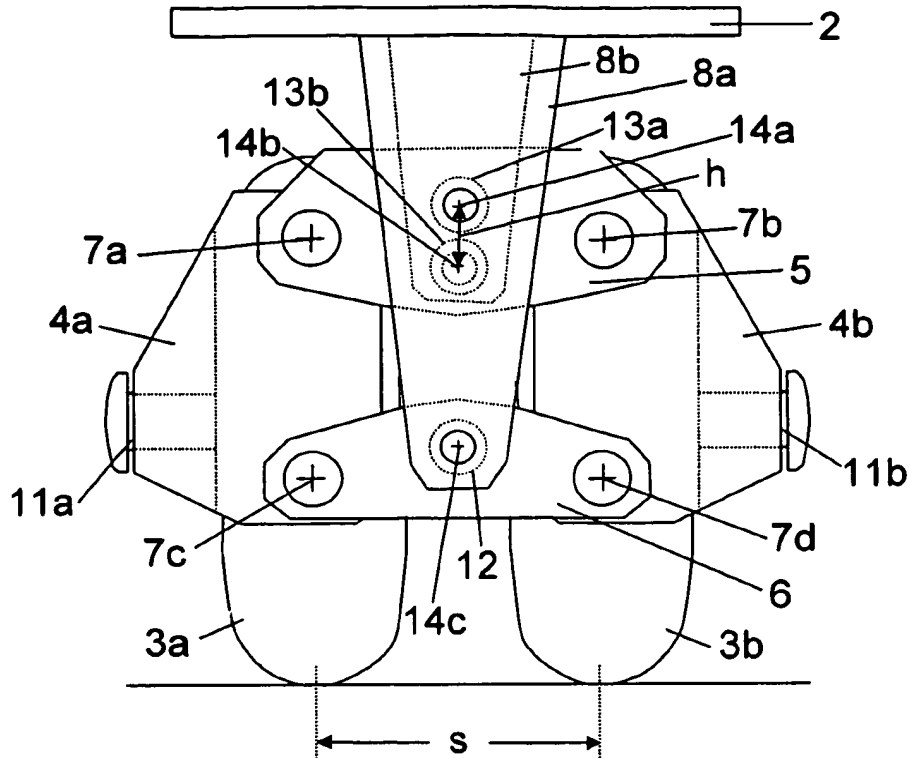


FIG. 3


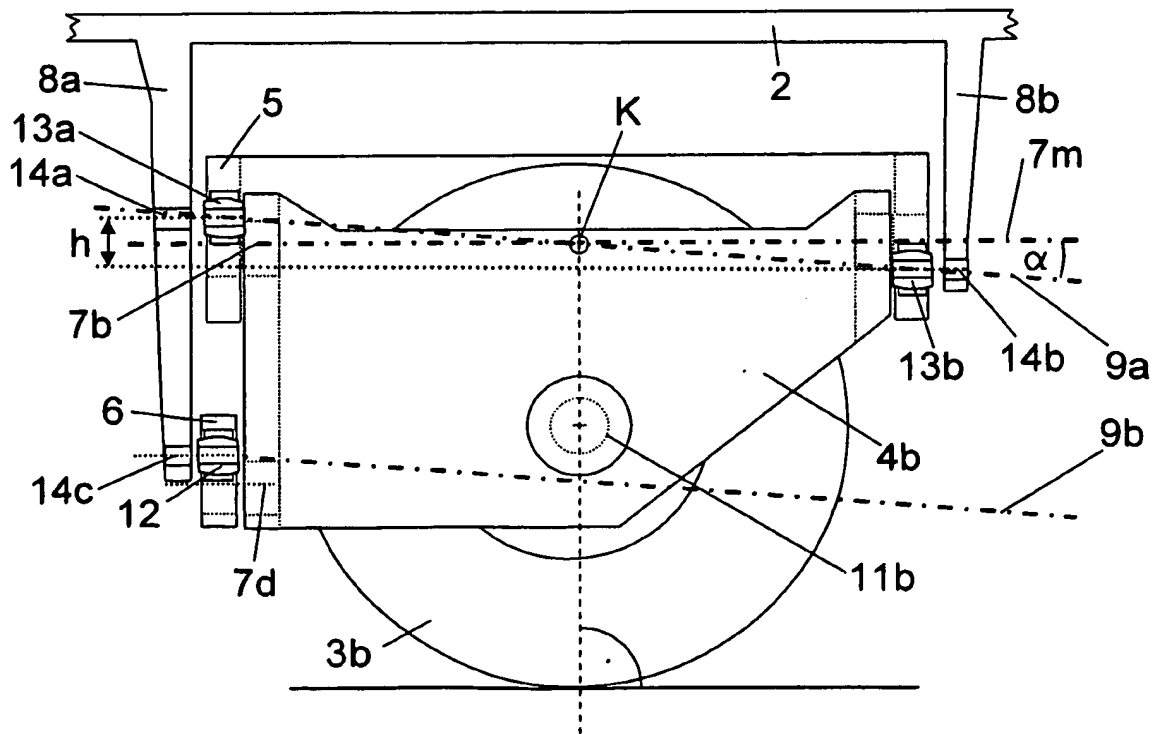


FIG. 4





Replacement sheet

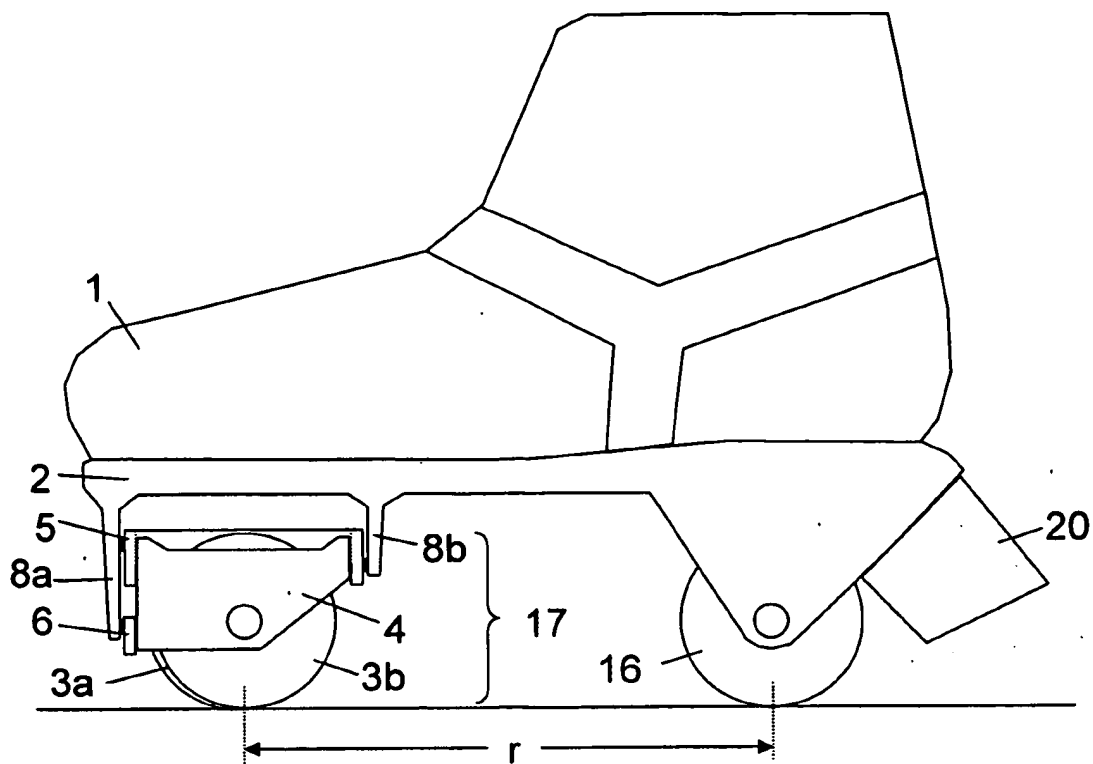


FIG. 5



Annotated marked-up drawing


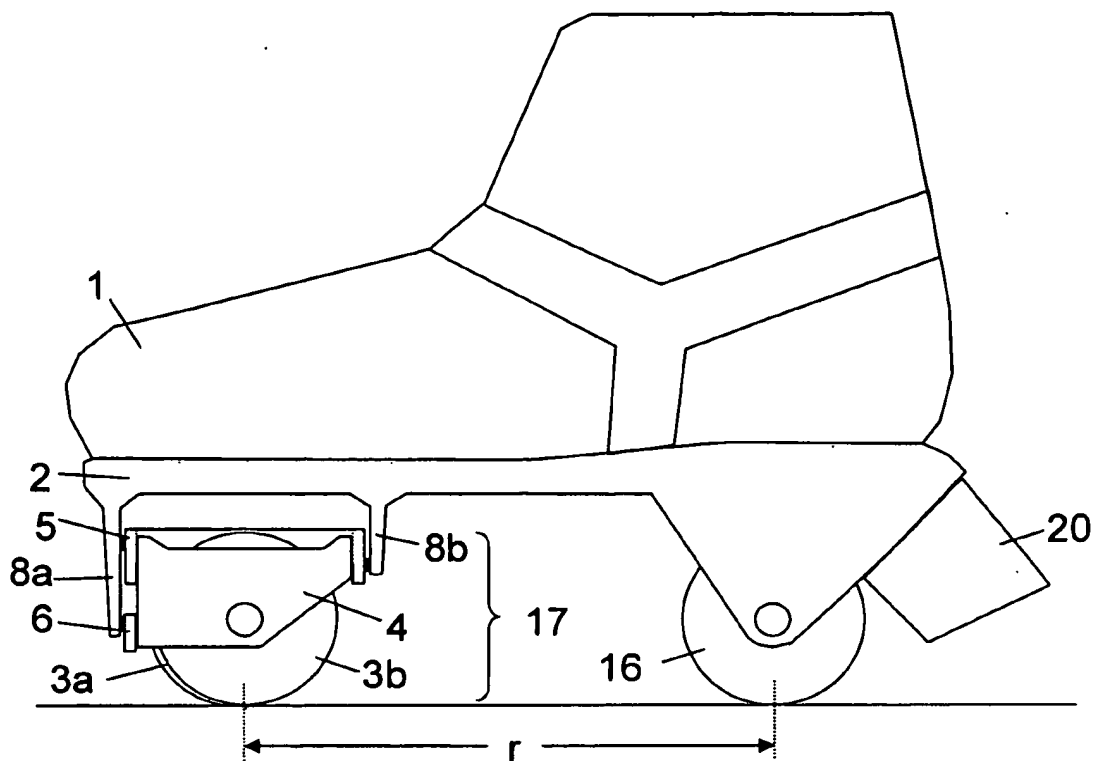


FIG. 5



~~FIG. 6~~



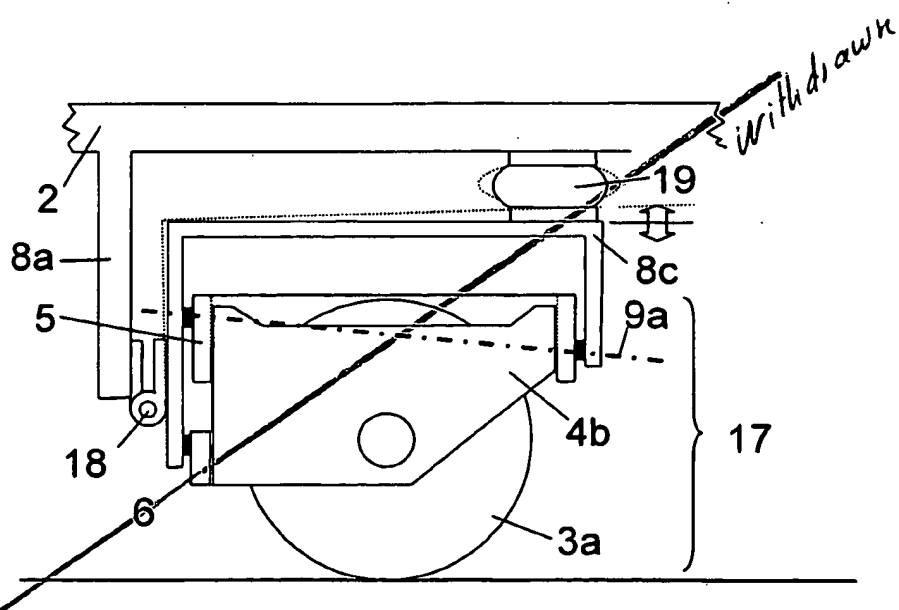

Replacement Sheet

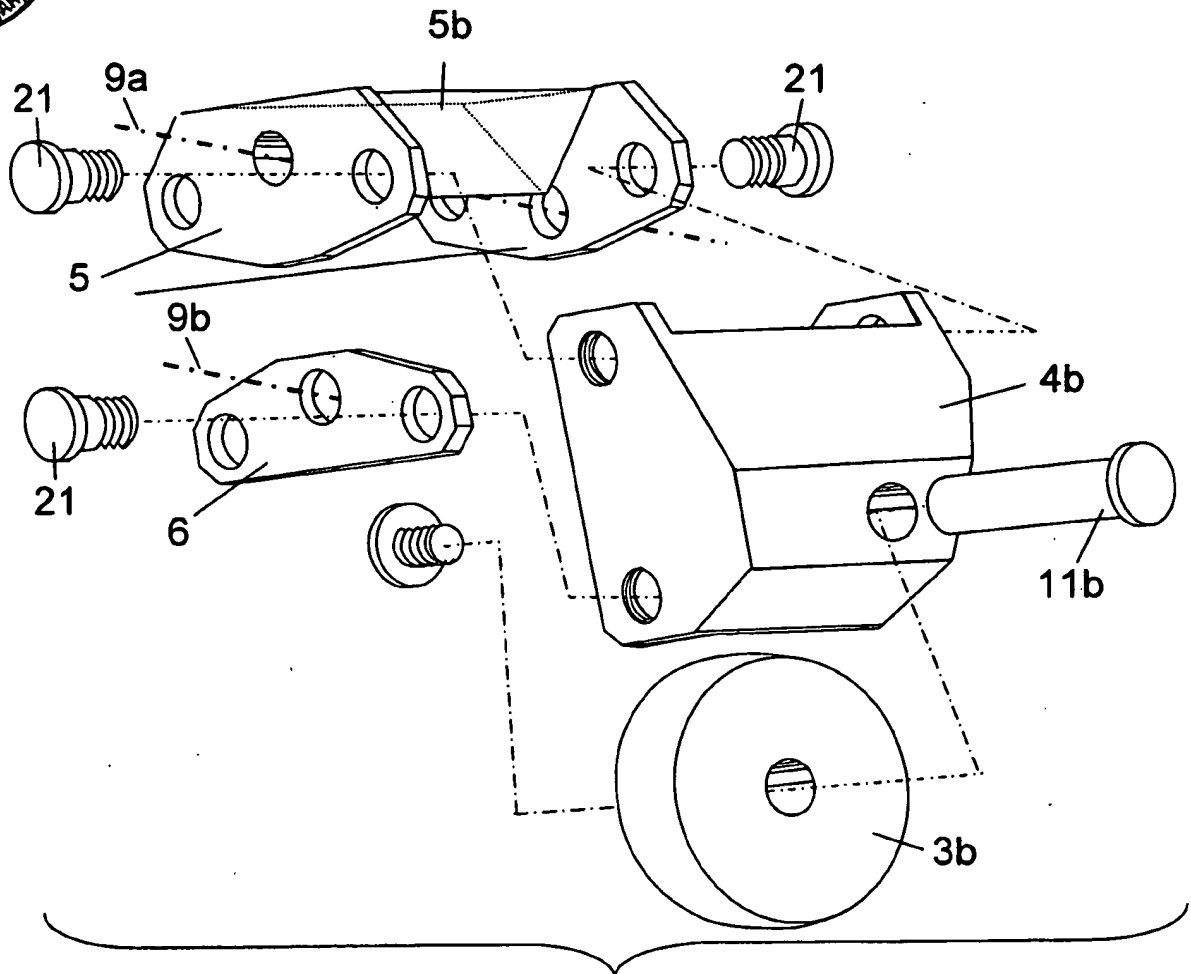


FIG. 6

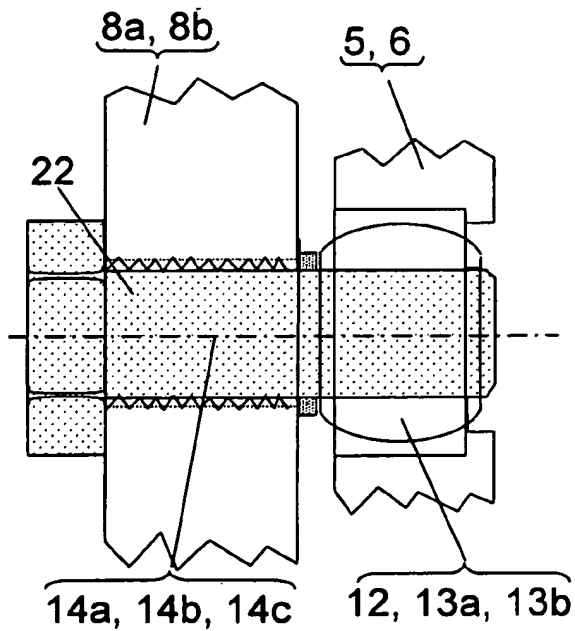


FIG. 7

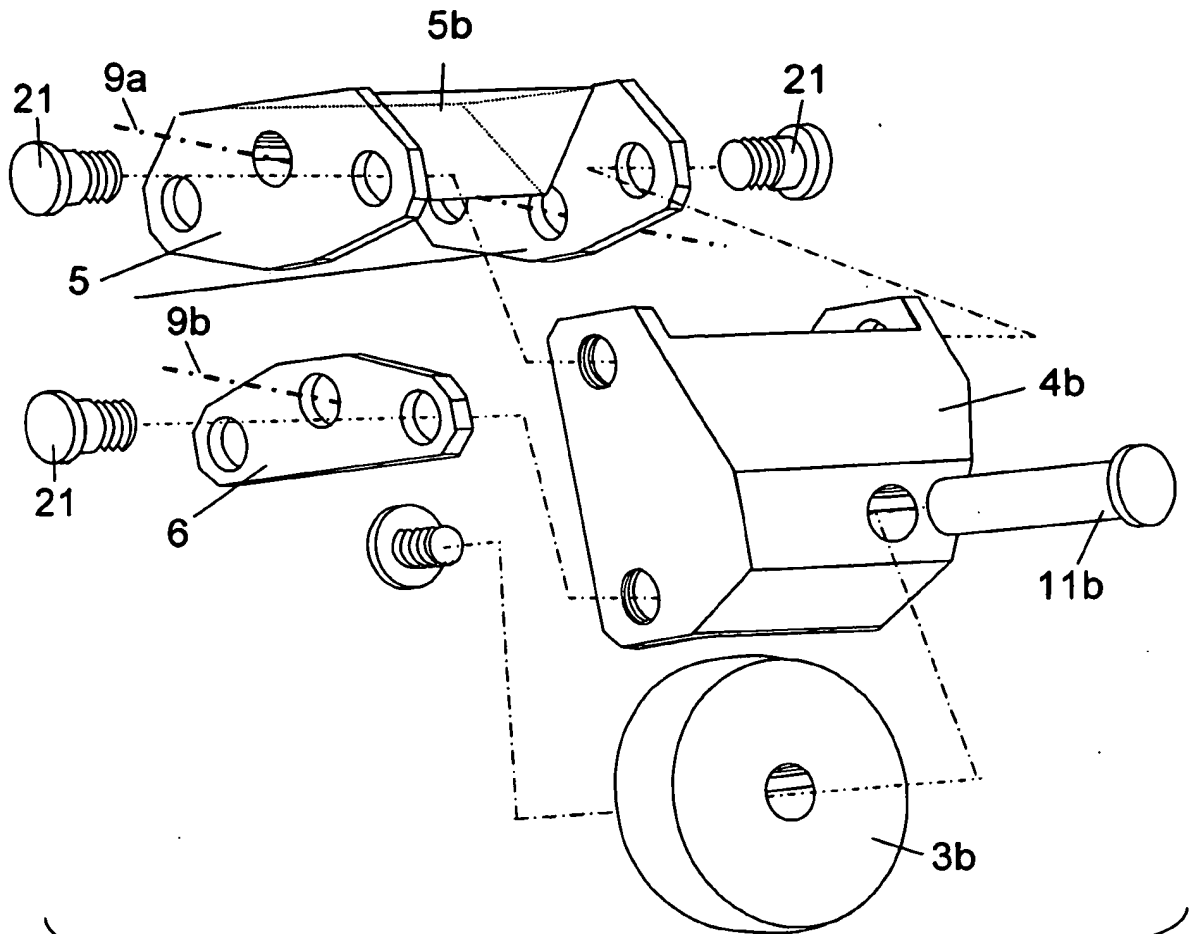


FIG. 7

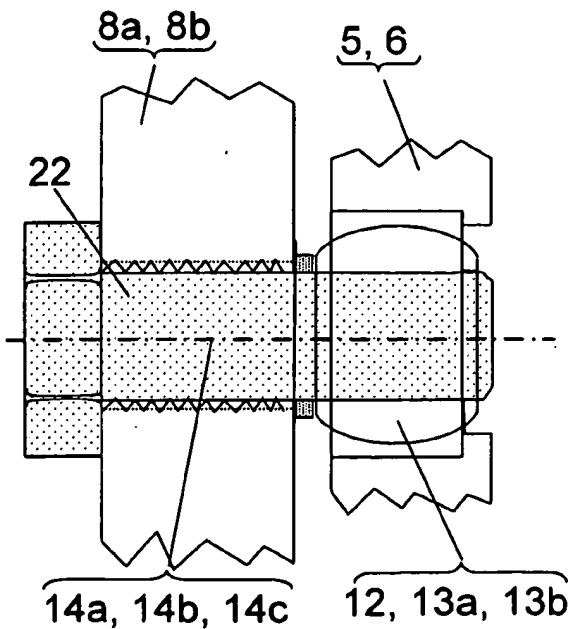


FIG. 8

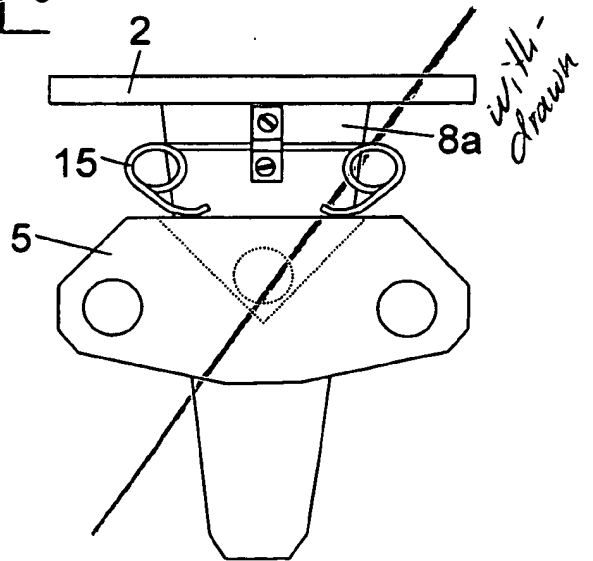


FIG. 9



3618

Wolfram GORISCH
Dueppeler Str. 20
D 81929 Muenchen
Phone: +49 89 93930253
Fax: +49 89 93930254
Email: wgorisch@t-online.de

United States Patent and Trademark Office
Commissioner for patents
Hau Van Phan, examiner
P.O.Box 1450
Alexandria, Virginia 22313-1450
U.S.A.

*please
enter
3/5/04
HP*

Application No. 10/026,567
GORISCH, WOLFRAM
Examiner: Hau V Phan
Art Unit 3618
Final Office action, mailing date 12/12/2003

RECEIVED

FEB 05 2004

01/23/2004

GROUP 3600

The following is my reply to the Office action.

Ad 1 and 2:

A substitute specification (single sided) is enclosed. Substitute drawings are enclosed, including drawings deleted and drawing renumbering.

Statement:

I herewith state and declare that this substitute specification as well as the prior substitute specification includes no new matter.
(signed with this reply)

Ad 3:

Noted

Ad 4:

Fig. 6 (and Fig. 9) belong to a non-elected species and are to be considered as withdrawn.
See substitute drawings.

Ad 5:

A substitute abstract is enclosed

Ad 6:

Correction according to claim objections is provided. See amended claims.

Ad 7:
Noted

Ad 8:
The term "extension" refers to the same item. To my opinion this may be clear enough for the reader as the extensions from "a platform which comprises extensions" and "extensions of the platform" should mean the same. However, the text still seemed to be indistinct in using the indefinite term "extensions". I tried to make this clearer in introducing "at least one extension".

If this amendment is still not sufficiently clear, I propose to use the expression "... said at least one extension".

Additional item:

In claim 1 line 11 the term "... second cross-guide is universally joined with ..." seems to exclude any embodiment from my invention which does not use a universal joint at this place. The original intention was, however, that the second cross-guide, by design, is allowed (not: forced) to swivel around the axis with the "skew" angle α . This complies with the original wording of claim 1. Now, instead of saying "universally joined" I would rather say "jointed" (Websters: to joint: to fasten together by a joint, jointed: provided with joints). To my opinion this expression does not sacrifice clarity. Such a joint could be universal or rotational. It must not be universal.

Please concur.

Ad 9:
The claims are amended to overcome the rejections.

Ad 10:
Noted

Ad 11:
Noted. I understand that this is my first reply and possibly an advisory action will be taken by USPTO. I tried to fulfil any requirement. If there still remains any formal inconsistency which could be settled informally, please use email (wgorisch@t-online.de) to give advice. I will try to comply immediately.



Wolfram Gorisch

Attachments



Application/Control Number: 10/026,457

Art Unit: 3618

Reference: Office Action, Mailing date 12/12/2003

Examiner: Hau V Phan

The following is a substitute specification excluding the drawings, based on the prior substitute specification submitted 09/12/2003.

Marked-up version with changes

RECEIVED
FEB 05 2004
GROUP 3600

BACKGROUND OF THE INVENTION

This invention relates to rolling devices such as roller skates, inline skates, skateboards, scooters, skis on wheels, wheel chairs, tricycles etc. Roller skates and skateboards are known which provide two non-tiltable wheel pair mechanisms, named trucks, one at each end, wherein the platform can be tilted sideways and the wheels steer responding to the tilt by making the trucks rotate, comprising inclined rotation axes, thereby influencing the direction in which the wheels are rolling. Usually cylindrical wheels are used that cause undesirably high friction. Upon tilting, the mass acceleration forces are directed off the midline of the wheels' tracks, loading the wheels unequally and finally limiting the maximum tilt angle. Inline skates, however, tilt as a whole. They are equipped with the known narrow wheels, which have little friction, but they cannot be steered by tilt.

DE19803412A1 discloses tiltable and tilt-steered wheel supports, wherein the wheels are fixed to longitudinal guides, the latter functioning as a compound guide system based on two sets of longitudinal fourfold linked chains. Any such solution using longitudinal guides is technically complex. Another problem is that such a solution causes unequal loading on the wheels of each pair.

This disadvantage has been overcome by using cross-guides. WO85/03644A1 describes wheels affixed to holders, which are guided using cross-guides in order to form a parallelogram chain having four links each. The entire system is pivotally secured to a base plate, where the pivot axis is vertically oriented with respect to this base plate, like a bogie. Steering is coupled to the tilt by using two gear wheels where one gear wheel is attached to the base plate. This solution still requires many parts and is complex.

BRIEF SUMMARY OF THE INVENTION

A principal objective of the present invention is to provide a novel steering mechanism to be used in wholly tiltable rolling devices wherein the steering angle is coupled to the tilt angle in a simple and kinematically well defined manner. Another major objective of this invention is to provide a steering mechanism which distributes the radial load equally on the wheels. A further important objective of this invention is to provide a steering mechanism which uses only a few simple parts or standard components.

These advantages are attained as follows. A multi-tracked tilt-steered rolling device which incorporates pairs of tiltable wheels wherein the wheels are guided in form of a parallelogram is modified so that it comprises two cross-guides 5, 6 which are rotatably affixed to extensions 8a, 8b of the platform, their rotation axes 9a, 9b being at an angle α ~~(alpha)~~ to the pivot axes 7a, 7b, 7c, 7d, of the parallelogram link chain. These two cross-guides 5, 6 attach pivotably to two separate wheel holders 4a, 4b where the pivot axes 7a, 7b of the first cross-guide 5 and the pivot axes 7c, 7d of the second cross-guide 6 are preferably oriented longitudinally and parallel, so that the known parallelogram link chain is formed. One wheel 3a is rotatably affixed to one wheel holder 4a and the other wheel 3b is rotatably affixed to the other wheel holder 4b. Alternatively the second cross-guide 6 is universally joined to the extension of the platform 2 using a universal joint 12. The angle α ~~(alpha)~~ makes the rolling device capable to be steered by tilt.

BRIEF DESCRIPTION OF THE SEVERAL VIEWS OF THE DRAWING

FIG. 1 is a front view of a skate in the upright (FIG. 1a) and in the tilt-steered (FIG. 1b) positions.

FIG. 2 is a front view of the invented tilt-steering parallelogram link chain in the tilted position.

FIG. 3 is a front view of the preferred embodiment of the invented parallelogram link chain carrying the wheel pair, in the upright position.

FIG. 4 is a side view of this embodiment.

FIG. 5 is a side view of a skate which incorporates three wheels.

~~FIG. 7~~ FIG. 6 is an exploded perspective view of part of the tilt-steering mechanism.

~~FIG. 8~~ FIG. 7 is an enlarged view of a possible embodiment of the universal joint which connects the cross-guides with the extensions of the platform.

DETAILED DESCRIPTION OF THE INVENTION

As shown in FIG. 1 the directions which the wheel pair 3a, 3b and the guiding wheel 16 take, are equal and coincide with the longitudinal axis of the platform 2. FIG. 1b illustrates in the same general manner the tilted position of the skate, showing that the wheels are tilted as well, and showing also that the wheels 3a, 3b of the wheel pair have a steering angle with respect to both, the platform 2 and the guiding wheel 16. FIG. 3 shows the front view of a parallelogram link chain, which consists of the two wheel holders, left 4a and right 4b, and the two cross-guides, the first on top, 5, and the second below, 6. The parallelogram link chain, described by its four pivot axes 7a, 7b, 7c, 7d is rectangular, as shown in FIG. 3, or is a non-rectangular parallelogram, as shown in FIG. 2. The invention also includes the possibility that the four pivot axes resemble a trapezium (not drawn).

FIGS. 2, 3 and 4 illustrate how the steering mechanism works. As the cross-guide 5 according to the invention is rotating, with the rotation axis 9a inclining at an angle α (alpha) with respect to the pivot axes 7a, 7b, 7c, 7d of the link chain, the tilting of the platform 2 and its extensions 8a,

8b with respect to the cross-guide 5 will cause the end of the cross-guide 5 to swivel out of the center plane of the platform 2, as shown in FIG. 2. The other end of cross-guide 5 swivels inwards. This results in a steering angle which increases as the tilt angle increases. The kinematics is shown in FIG. 2, viewed in the direction of the axes 7a, 7b, 7c, 7d. The platform 2 is then seen at a shallow perspective angle.

Although FIGS. 2 ~~to 6~~ to 5 anticipate that the axes 7a, 7b, 7c, 7d are oriented longitudinally with respect to the rolling device and are oriented parallel to the ground, this is not necessarily a prerequisite of the present invention. The essential condition for ensuring the tilt-steering function is the presence of an angle α ~~(alpha)~~ as described above.

~~FIG. 7~~ FIG. 6 shows the two cross-guides 5, 6, the right wheel holder 4b, one wheel 3b and its bolt and axle 11b. The respective symmetrical wheel and wheel holder from the left side are omitted. The cross-guide 5 incorporates a bridge 5b which has a cross-sectional area large enough to ensure high torsion stiffness. In this embodiment the cross-section of the bridge 5b is a triangle. The preferred embodiment of the invented obliquely swiveling parallelogram link chain contains six links, where the first cross-guide 5 has four holes and the second cross-guide 6 has two holes. Six bolts (three bolts 21 are shown in FIG. 7) or axles connect the two cross-guides 5, 6 with the two wheel holders 4a, 4b which accordingly have three eye-holes each to accommodate the six bolts or axles. These six links pivotally connecting the cross-guides with the wheel-holders can easily be designed in an obvious way. Steel bolts can also be combined with standard cylindrical bearings made from brass or plastic, which fit into the eye-holes (not drawn).

Referring to FIG. 5 the rolling device is able to steer along a curved track if the device has rotatably affixed to the platform at least one guiding wheel 16 which has a distance r (wheel base) to the wheels 3a, 3b of the wheel pair.

Another parallelogram wheel pair mechanism can be used instead of using the one guiding wheel 16. Its angle α ~~(alpha)~~ may be designed to be zero. In this case this wheel pair does not steer. The device's ability to curve is only determined by the steering function of those wheel pair mechanisms whose angles α ~~(alpha)~~ are not zero.

The invented obliquely rotating parallelogram link chain mechanism only consists of a few simple parts. Design components can be cheaply molded, formed or machined. Materials used may include light metal such as aluminum or other strong or reinforced (e.g. glass or carbon fiber resin) plastic.

Certain applications e.g. roller skates, require the wheels to be placed underneath the platform 2. Upon tilting the platform, one wheel of the wheel pair 17 moves upwards approaching the platform 2, and the other wheel moves away from it. The space between the wheels and the platform needed for this movement increases with both the maximum tilt angle and the track width s between the two wheels 3a, 3b of the wheel pair. In order to minimize the space required i.e. to avoid an excessive "high-heeled" design, it is desirable to design the track width s to be as small as possible. As can be seen in FIG. 2 the lateral space between the two parallelogrammically guided wheels decreases upon tilting. In addition, space is required for affixing the wheels' axles 11a, 11b. This additional space can be spared, if necessary, if the axles are fixed to the wheel holder only at the outer side of the wheels.

If, upon tilting, the track width alters, at least one of the two wheels 3a, 3b will slide sideways on the ground, causing friction and wear. An embodiment is therefore preferred which stabilizes the track, avoiding friction or wear, by having the distance between the pivot axes 7a and 7b of the first cross-guide 5, which is equal to the distance between the pivot axes 7c and 7d of the second cross-guide 6, made now equal to the track width s by design.

The present invention is compatible with a design, where each of the two cross-guides 5, 6 has a cylindrical bored hole, both parallel to each other but obliquely oriented with respect to the pivot axes 7a, 7b, 7c, 7d, where the holes serve to accommodate axles to be affixed to extensions 8a, 8b of the platform. This embodiment is possibly kinematically over-defined, as (in brief) the two cross-guides are forced to move in a parallel orientation by two independent mechanisms, first by the two axles, secondly by the parallelogram link chain, both mechanisms possibly interfering with each other, if design tolerances are unfavorable. In order to avoid such interference, only one cross-guide 5 is supplied with a rotation axis 9a as mentioned, affixing this rotation axis 9a at extensions 8a, 8b of the platform 2, but supplying the second cross-guide 6 with a universal joint 12, e.g. in form of a spherical bushing or the like, connecting the cross-guide 6 with the extension 8a of the platform 2 using the universal joint 12 (see FIG. 4).

This invention may also imply that the rotation axis 9a is directed obliquely with respect to most of the component parts' edges and faces. Technically any skew angled drilling, washers, axles etc. cause considerably high manufacturing costs. The use of universal joints 13a, 13b ensures the function of an oblique rotation axis combined with hole drilling to be simply perpendicular to the part surfaces. The obliquity of the rotation axis 9a is ensured by placing the two universal joints 13a and 13b with a vertical offset h. The rotation axis 9a is now defined by the straight line through the centers of the two universal joints 13a, 13b. Another advantage of using universal joints instead of full-length axles is that the full-length axle needs space which in some designs is difficult to provide.

~~FIG. 8~~ FIG. 7 shows how the parts can be connected using a spherical bushing as universal joint. A threaded bolt 22, having a cylindrical portion, is placed through the spherical bushing 12, 13a, or 13b. The parts to be connected are the cross-guide 5

resp. 6 to extension 8a resp. 8b of the platform 2. The bolts 22 have axes 14a, 14b, 14c.

Many rolling devices like roller skates or scooters need to be functionally right-left symmetrical. This symmetry is realized by having the oblique rotation axis 9a lie in the longitudinal vertical symmetry plane of the device. As the center parallel line 7m between axes 7a and 7b as well as the rotation axis 9a are lying within the symmetry plane, there exists a point K where the axes 9a and 7m intersect.

One of the objects of this invention is to avoid swiveling of the wheel pair out of the center line upon tilting. The wheels 3a, 3b of the wheel pair will, upon tilt, stay within the center line, if by design the intersection point K is positioned vertically above the axles 11a, 11b, as shown in FIG. 4.

An embodiment is proposed which ensures that the device, e.g. a roller skate, assumes a neutral position i.e. the upright non-tilted position, see FIG. 1a, when lifted from the ground. This objective is met by introducing a flexing means, which returns or maintains the wheel pair in the neutral position using the force of this flexible material or of a spring.

FIG. 5 illustrates that the device additionally incorporates a wheel 16 which is affixed longitudinally at a certain distance to the wheel pair, the wheel base r, in order to be able to be steered. Alternatively another tilt-steering wheel pair which is designed according to this invention can be affixed. The curve radius depends on the angles α ~~(alpha)~~, which pertain to the one or two tilt-steering mechanisms. It also depends on the wheel base r. The curve radius becomes small when by design the angles α ~~(alpha)~~ are chosen to be large and the wheel base r is small. For this new tilt-steering skates, α ~~(alpha)~~ may range from 3 to 10 degrees to be useful. The wheel base r may range from 20 to 35 centimeter, dependent on the preferred use of the skate. For example the designer of speed-skates may allow for smooth long curves. The mentioned ranges for α ~~(alpha)~~ and r are not meant to exclude other values. It is just this variability which opens

ways to commercialize a wide variety of rolling devices specifically intended for different uses.

The most economic embodiment of the invention combines one tilt-steered wheel pair with one fixed wheel.

If four wheels are preferred because of improved weight distribution or to keep better the track then two tilt-steering wheel pairs 17 can be affixed at either end of the rolling device. It is to be noted that the rearmost affixed wheel pair should have its rotation axis 9a be designed to be declining, and that the front wheel pair should have its rotation axis 9a be designed to be inclining, both viewed from behind. An alternative four-wheeled embodiment combines one tilt-steering wheel pair with one pair of wheels in-line, both pairs being affixed at opposite ends of the rolling device (not drawn).



Application/Control Number: 10/026,457 567
Art Unit: 3618

Reference: Office Action, Mailing date 12/12/2003

Examiner: Hau V Phan

*please
enter
HP
3/5/04*


The following is a substitute specification excluding the drawings, based on the prior substitute specification submitted 09/12/2003.

Clean version

Statement

I herewith state and declare that this substitute specification as well as the prior substitute specification includes no new matter.

January 22, 2004
Date


Wolfram GORISCH, applicant

BACKGROUND OF THE INVENTION

This invention relates to rolling devices such as roller skates, inline skates, skateboards, scooters, skis on wheels, wheel chairs, tricycles etc. Roller skates and skateboards are known which provide two non-tiltable wheel pair mechanisms, named trucks, one at each end, wherein the platform can be tilted sideways and the wheels steer responding to the tilt by making the trucks rotate, comprising inclined rotation axes, thereby influencing the direction in which the wheels are rolling. Usually cylindrical wheels are used that cause undesirably high friction. Upon tilting, the mass acceleration forces are directed off the midline of the wheels' tracks, loading the wheels unequally and finally limiting the maximum tilt angle. Inline skates, however, tilt as a whole. They are equipped with the known narrow wheels, which have little friction, but they cannot be steered by tilt.

DE19803412A1 discloses tiltable and tilt-steered wheel supports, wherein the wheels are fixed to longitudinal guides, the latter functioning as a compound guide system based on two sets of longitudinal fourfold linked chains. Any such solution using longitudinal guides is technically complex. Another problem is that such a solution causes unequal loading on the wheels of each pair.

This disadvantage has been overcome by using cross-guides. WO85/03644A1 describes wheels affixed to holders, which are guided using cross-guides in order to form a parallelogram chain having four links each. The entire system is pivotally secured to a base plate, where the pivot axis is vertically oriented with respect to this base plate, like a bogie. Steering is coupled to the tilt by using two gear wheels where one gear wheel is attached to the base plate. This solution still requires many parts and is complex.

BRIEF SUMMARY OF THE INVENTION

A principal objective of the present invention is to provide a novel steering mechanism to be used in wholly tiltable rolling devices wherein the steering angle is coupled to the tilt angle in a simple and kinematically well defined manner. Another major objective of this invention is to provide a steering mechanism which distributes the radial load equally on the wheels. A further important objective of this invention is to provide a steering mechanism which uses only a few simple parts or standard components.

These advantages are attained as follows. A multi-tracked tilt-steered rolling device which incorporates pairs of tiltable wheels wherein the wheels are guided in form of a parallelogram is modified so that it comprises two cross-guides 5, 6 which are rotatably affixed to extensions 8a, 8b of the platform, their rotation axes 9a, 9b being at an angle α to the pivot axes 7a, 7b, 7c, 7d, of the parallelogram link chain. These two cross-guides 5, 6 attach pivotably to two separate wheel holders 4a, 4b where the pivot axes 7a, 7b of the first cross-guide 5 and the pivot axes 7c, 7d of the second cross-guide 6 are preferably oriented longitudinally and parallel, so that the known parallelogram link chain is formed. One wheel 3a is rotatably affixed to one wheel holder 4a and the other wheel 3b is rotatably affixed to the other wheel holder 4b. Alternatively the second cross-guide 6 is universally joined to the extension of the platform 2 using a universal joint 12. The angle α makes the rolling device capable to be steered by tilt.

BRIEF DESCRIPTION OF THE SEVERAL VIEWS OF THE DRAWING

FIG. 1 is a front view of a skate in the upright (FIG. 1a) and in the tilt-steered (FIG. 1b) positions.

FIG. 2 is a front view of the invented tilt-steering parallelogram link chain in the tilted position.

FIG. 3 is a front view of the preferred embodiment of the invented parallelogram link chain carrying the wheel pair, in the upright position.

FIG. 4 is a side view of this embodiment.

FIG. 5 is a side view of a skate which incorporates three wheels.

FIG. 6 is an exploded perspective view of part of the tilt-steering mechanism.

FIG. 7 is an enlarged view of a possible embodiment of the universal joint which connects the cross-guides with the extensions of the platform.

DETAILED DESCRIPTION OF THE INVENTION

As shown in FIG. 1 the directions which the wheel pair 3a, 3b and the guiding wheel 16 take, are equal and coincide with the longitudinal axis of the platform 2. FIG. 1b illustrates in the same general manner the tilted position of the skate, showing that the wheels are tilted as well, and showing also that the wheels 3a, 3b of the wheel pair have a steering angle with respect to both, the platform 2 and the guiding wheel 16. FIG. 3 shows the front view of a parallelogram link chain, which consists of the two wheel holders, left 4a and right 4b, and the two cross-guides, the first on top, 5, and the second below, 6. The parallelogram link chain, described by its four pivot axes 7a, 7b, 7c, 7d is rectangular, as shown in FIG. 3, or is a non-rectangular parallelogram, as shown in FIG. 2. The invention also includes the possibility that the four pivot axes resemble a trapezium (not drawn).

FIGS. 2, 3 and 4 illustrate how the steering mechanism works. As the cross-guide 5 according to the invention is rotating, with the rotation axis 9a inclining at an angle α with respect to the pivot axes 7a, 7b, 7c, 7d of the link chain, the tilting of the platform 2 and its extensions 8a, 8b with respect to the cross-guide 5 will cause the end of the cross-guide 5 to

swivel out of the center plane of the platform 2, as shown in FIG. 2. The other end of cross-guide 5 swivels inwards. This results in a steering angle which increases as the tilt angle increases. The kinematics is shown in FIG. 2, viewed in the direction of the axes 7a, 7b, 7c, 7d. The platform 2 is then seen at a shallow perspective angle.

Although FIGS. 2 to 5 anticipate that the axes 7a, 7b, 7c, 7d are oriented longitudinally with respect to the rolling device and are oriented parallel to the ground, this is not necessarily a prerequisite of the present invention. The essential condition for ensuring the tilt-steering function is the presence of an angle α as described above.

FIG. 6 shows the two cross-guides 5, 6, the right wheel holder 4b, one wheel 3b and its bolt and axle 11b. The respective symmetrical wheel and wheel holder from the left side are omitted. The cross-guide 5 incorporates a bridge 5b which has a cross-sectional area large enough to ensure high torsion stiffness. In this embodiment the cross-section of the bridge 5b is a triangle. The preferred embodiment of the invented obliquely swiveling parallelogram link chain contains six links, where the first cross-guide 5 has four holes and the second cross-guide 6 has two holes. Six bolts (three bolts 21 are shown in FIG. 7) or axles connect the two cross-guides 5, 6 with the two wheel holders 4a, 4b which accordingly have three eyeholes each to accommodate the six bolts or axles. These six links pivotally connecting the cross-guides with the wheel-holders can easily be designed in an obvious way. Steel bolts can also be combined with standard cylindrical bearings made from brass or plastic, which fit into the eye-holes (not drawn).

Referring to FIG. 5 the rolling device is able to steer along a curved track if the device has rotatably affixed to the platform at least one guiding wheel 16 which has a distance r (wheel base) to the wheels 3a, 3b of the wheel pair. Another parallelogram wheel pair mechanism can be used instead of using the one guiding wheel 16. Its angle α may be designed

to be zero. In this case this wheel pair does not steer. The device's ability to curve is only determined by the steering function of those wheel pair mechanisms whose angles α are not zero.

The invented obliquely rotating parallelogram link chain mechanism only consists of a few simple parts. Design components can be cheaply molded, formed or machined. Materials used may include light metal such as aluminum or other strong or reinforced (e.g. glass or carbon fiber resin) plastic.

Certain applications e.g. roller skates, require the wheels to be placed underneath the platform 2. Upon tilting the platform, one wheel of the wheel pair 17 moves upwards approaching the platform 2, and the other wheel moves away from it. The space between the wheels and the platform needed for this movement increases with both the maximum tilt angle and the track width s between the two wheels 3a, 3b of the wheel pair. In order to minimize the space required i.e. in order to avoid an excessive "high-heeled" design, it is desirable to design the track width s to be as small as possible. As can be seen in FIG. 2, the lateral space between the two parallelogrammically guided wheels decreases upon tilting. In addition, space is required for affixing the wheels' axles 11a, 11b. This additional space can be spared, if necessary, if the axles are fixed to the wheel holder only at the outer side of the wheels.

If, upon tilting, the track width alters, at least one of the two wheels 3a, 3b will slide sideways on the ground, causing friction and wear. An embodiment is therefore preferred which stabilizes the track, avoiding friction or wear, by having the distance between the pivot axes 7a and 7b of the first cross-guide 5, which is equal to the distance between the pivot axes 7c and 7d of the second cross-guide 6, made now equal to the track width s by design.

The present invention is compatible with a design, where each of the two cross-guides 5, 6 has a cylindrical bored hole,

both parallel to each other but obliquely oriented with respect to the pivot axes 7a, 7b, 7c, 7d, where the holes serve to accommodate axles to be affixed to extensions 8a, 8b of the platform. This embodiment is possibly kinematically over-defined, as (in brief) the two cross-guides are forced to move in a parallel orientation by two independent mechanisms, first by the two axles, secondly by the parallelogram link chain, both mechanisms possibly interfering with each other, if design tolerances are unfavorable. In order to avoid such interference, only one cross-guide 5 is supplied with a rotation axis 9a as mentioned, affixing this rotation axis 9a at extensions 8a, 8b of the platform 2, but supplying the second cross-guide 6 with a universal joint 12, e.g. in form of a spherical bushing or the like, connecting the cross-guide 6 with the extension 8a of the platform 2 using the universal joint 12 (see FIG. 4).

This invention may also imply that the rotation axis 9a is directed obliquely with respect to most of the component parts' edges and faces. Technically any skew angled drilling, washers, axles etc. cause considerably high manufacturing costs. The use of universal joints 13a, 13b ensures the function of an oblique rotation axis combined with hole drilling to be simply perpendicular to the part surfaces. The obliquity of the rotation axis 9a is ensured by placing the two universal joints 13a and 13b with a vertical offset h. The rotation axis 9a is now defined by the straight line through the centers of the two universal joints 13a, 13b. Another advantage of using universal joints instead of full-length axles is that the full-length axle needs space which in some designs is difficult to provide.

FIG. 7 shows how the parts can be connected using a spherical bushing as universal joint. A threaded bolt 22, having a cylindrical portion, is placed through the spherical bushing 12, 13a, or 13b. The parts to be connected are the cross-guide 5 resp. 6 to extension 8a resp. 8b of the platform 2. The bolts 22 have axes 14a, 14b, 14c.

Many rolling devices like roller skates or scooters need to be functionally right-left symmetrical. This symmetry is realized by having the oblique rotation axis 9a lie in the longitudinal vertical symmetry plane of the device. As the center parallel line 7m between axes 7a and 7b as well as the rotation axis 9a are lying within the symmetry plane, there exists a point K where the axes 9a and 7m intersect.

One of the objects of this invention is to avoid swiveling of the wheel pair out of the center line upon tilting. The wheels 3a, 3b of the wheel pair will, upon tilt, stay within the center line, if by design the intersection point K is positioned vertically above the axles 11a, 11b, as shown in FIG. 4.

An embodiment is proposed which ensures that the device, e.g. a roller skate, assumes a neutral position i.e. the upright non-tilted position, see FIG. 1a, when lifted from the ground. This objective is met by introducing a flexing means, which returns or maintains the wheel pair in the neutral position using the force of this flexible material or of a spring.

FIG. 5 illustrates that the device additionally incorporates a wheel 16 which is affixed longitudinally at a certain distance to the wheel pair, the wheel base r, in order to be able to be steered. Alternatively another tilt-steering wheel pair which is designed according to this invention can be affixed. The curve radius depends on the angles α which pertain to the one or two tilt-steering mechanisms. It also depends on the wheel base r. The curve radius becomes small when by design the angles α are chosen to be large and the wheel base r is small. For this new tilt-steering skates, α may range from 3 to 10 degrees to be useful. The wheel base r may range from 20 to 35 centimeter, dependent on the preferred use of the skate. For example the designer of speed-skates may allow for smooth long curves. The mentioned ranges for α and r are not meant to exclude other values. It is just this variability which opens ways to commercialize a wide variety of rolling devices specifically intended for different uses.

The most economic embodiment of the invention combines one tilt-steered wheel pair with one fixed wheel.

If four wheels are preferred because of improved weight distribution or to keep better the track then two tilt-steering wheel pairs 17 can be affixed at either end of the rolling device. It is to be noted that the rearmost affixed wheel pair should have its rotation axis 9a be designed to be declining, and that the front wheel pair should have its rotation axis 9a be designed to be inclining, both viewed from behind. An alternative four-wheeled embodiment combines one tilt-steering wheel pair with one pair of wheels in-line, both pairs being affixed at opposite ends of the rolling device (not drawn).



Application/Control Number: 10/026,457

Unit: 3618

Reference: Office Action, Mailing date 12/12/2003

Examiner: Hau V Phan

The following is the substitute abstract, both, clean and marked-up versions.

Abstract

RECEIVED

FEB 05 2004

GROUP 3600

ABSTRACT

A rolling device comprises a wheel pair, consisting of two wheels (3a, 3b) affixed to wheel-holders (4a, 4b), which are interconnected by two cross-guides (5, 6) thus forming a parallelogram link chain. One cross-guide (5) is rotatably secured to extensions of the platform providing an acute angle between a rotation axis (9a) and the pivot axes (7a, 7b, 7c, 7d) of the four links which constitute the parallelogram link chain. The second cross-guide (6) is secured at the platform extension using a universal joint. One such tilt-steering wheel pair mechanism together with at least one fixed wheel is attached at opposite ends of the rolling device to make it work.

ABSTRACT

A rolling device comprises a wheel pair, consisting of two wheels ~~3a, 3b~~ (3a, 3b) affixed to wheel-holders ~~4a, 4b~~ (4a, 4b), which are interconnected by two cross-guides ~~5, 6~~ (5, 6) thus forming a parallelogram link chain. One cross-guide ~~5~~ (5) is rotatably secured to extensions of the platform providing an acute angle between ~~its~~ a rotation axis ~~9a~~ (9a) and the pivot axes ~~7a, 7b, 7c, 7d~~ (7a, 7b, 7c, 7d) of the four links which constitute the parallelogram link chain. The second cross-guide ~~6~~ (6) is secured at the platform extension using a universal joint. One such tilt-steering wheel pair mechanism together with at least one fixed wheel ~~are~~ is attached at opposite ends of the rolling device to make it work ~~(FIG. 2)~~.